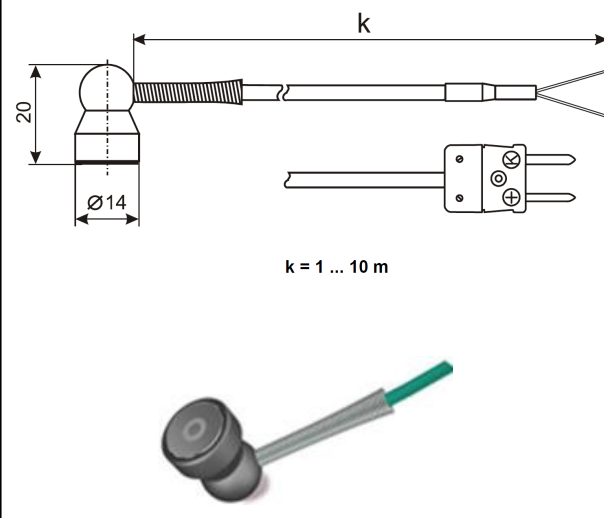


## SONDE MAGNETICE tip TSM

MAGNETIC PROBE FOR SURFACE MEASUREMENT Design - pawn-type plastic body w/ permanent magnet ring Cable - see table notes	TSM	SENSITIVE ELEMENT	CABLE TYPE	TEMPERATURE RANGE	WIRES
 <p style="text-align: center;">k = 1 ... 10 m</p>		1 x Pt (RB,RD,RF,RG)	SLFSL, TFT	T7** 0...200 °C T9** -50...200 °C	2, 3*
		1 x K, 1 x J	YFY	T10 -10...60 °C T12 -50...100 °C	2
		1 x T		T19 0...100 °C	2
	<p><b>Sheath material:</b> PPS plastic, magnet ring w/ ferrous metal jacket</p> <p><b>Cable type:</b> - SLFSL or TFSL (silicone w/ copper shield, max. 250 °C ambient temperature) - TFT (Teflon® w/ copper shield, max. 250 °C ambient temperature) - YFY (PVC w/ copper shield, max. 105 °C ambient temperature)</p> <p><b>Tip shape:</b> - RTD: standard - T/C: grounded (see Appendix - Tip Shapes)</p> <p><b>Accuracy class:</b> - RTD: 'A', 'B', or '2xB' - T/C: '1' or '2' (see Appendix - RTD or T/C Tolerance)</p> <p><b>Cable connector:</b> 4-pin (C3), 'T/C standard' (C5) or 'T/C miniature' (C6) (see Appendix - Connectors)</p>				
<p>* Please contact ** Up to 250 °C (short-term)</p>					

### Ordering code TSM - G2.G3.G8.G11.G12.G15 - #1

Code	Feature or option	Code values
G2	Sensor	RB - Pt50, RD - Pt100, RF - Pt500, RG - Pt1000, J - T/C type "J", K - T/C type "K", T - T/C type "T"
G3	Temperature range	T7 - 0...200(250) °C, T9 - -50...200(250) °C, T10 - -10...60 °C, T12 - -50...100 °C, T19 - 0...100 °C
G8	Cable length 'k' [m] and type	1SL...10SL - silicone, 1TF...10TF - Teflon®, 1PV...10PV - PVC
G11	Accuracy class	RTD: A - 'A', B - 'B', C - '2xB'
		T/C: 1 - '1' <sup>(2)</sup> , 2 - '2'
G12	Number of wires <sup>(1)</sup>	2, 3 <sup>(2)</sup>
G15	Connector	X - none, C3 - 4-pin male plug-in connector ø8 (for H5700 thermometer only), C5 - T/C connector, C6 - miniature T/C connector
#1	Options	X - none, OB - braid termination lead (only w/o connector)

<sup>(1)</sup> Only for RTD sensors!  
<sup>(2)</sup> Contact

Distributor:

SYSCOM 02 Srl Bucuresti

Tel./ Fax.: 021 410 5281; mobil: 0722 725 659; e-mail: [syscom02@automatizariindustriale.ro](mailto:syscom02@automatizariindustriale.ro);

[www.automatizariindustriale.ro](http://www.automatizariindustriale.ro)